

⑫

# EUROPEAN PATENT APPLICATION

⑪ Application number: 89401321.8

⑫ Date of filing: 11.05.89

⑬ Int. Cl.<sup>4</sup>: A 01 N 25/18  
 A 01 N 25/34, A 01 M 1/02,  
 B 32 B 27/08  
 //(A01N25/18,37:02,35:02)

⑭ Priority: 13.05.88 JP 116850/88  
 29.09.88 JP 245417/88

⑮ Date of publication of application:  
 15.11.89 Bulletin 89/46

⑯ Designated Contracting States: DE FR GB

⑰ Applicant: Shin-Etsu Chemical Co., Ltd.  
 6-1, Otemachi 2-chome  
 Chiyoda-ku Tokyo 100 (JP)

⑱ Inventor: Yamamoto, Akira  
 2-14-45 Gochi  
 Joetsu-shi Niigata-ken (JP)

Saguchi, Ryuzhi  
 7, Sanai-cho  
 Joetsu-shi Niigata-ken (JP)


Nagura, Shigehiro  
 1-4-7, Minato-cho 2-chome  
 Joetsu-shi Niigata-ken (JP)

⑲ Representative: Armengaud Aîné, Alain et al  
 Cabinet ARMENGAUD AÎNÉ 3 Avenue Bugeaud  
 F-75116 Paris (FR)

⑳ Sustained-release pheromone dispenser.

㉑ A bag-like dispenser is proposed which contains a sex pheromone compound of insects and is used for sustainedly releasing the pheromone compound at a uniform emission rate over a long period of time so as to exhibit effectiveness for the population control of pests by distributing a number of the dispensers over fields. The bag-like dispenser body is formed of a specific polymeric laminate film having a thickness of 20-200  $\mu$ m and composed of at least two layers or, preferably, of three layers, in which one of the layers is a film of a polymer or copolymer of vinylidene chloride having a thickness of 4-20  $\mu$ m as the intermediate layer of the three-layered laminate and the other layer or each of the other layers is a film of a specific polymer having a specified thickness, such as a film of a polyolefin, copolymer of ethylene and vinyl acetate, poly(vinyl chloride), copolymer of vinyl chloride and vinyl acetate and the like.

FIG. 1

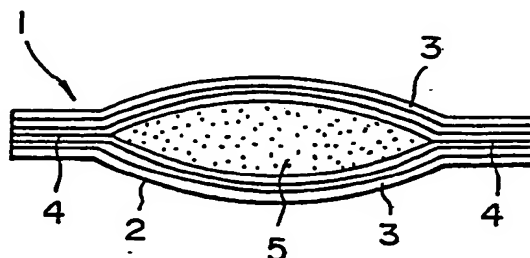

## Description

## SUSTAINED-RELEASE PHEROMONE DISPENSER

## BACKGROUND OF THE INVENTION

The present invention relates to a sustained-release pheromone dispenser or, more particularly, to a pheromone dispenser capable of sustainedly emitting a sex pheromone compound used for population control of an insect pest to the environment at a constant rate over a long period of time.

Many proposals have been made and are under practice in the prior art for sustainedly emitting a sex pheromone compound and the like effective for population control of a pest as contained in a suitable container to the environment at a constant rate of emission over a length of time. These prior art proposals can be classified into several types. The first type proposals are for a pheromone dispenser in which the sex pheromone compound is supported as being adsorbed by a suitable adsorbent as a carrier or as being admixed with a polymeric resin forming a carrier layer. For example, U.S. Patent No. 4,017,030 discloses a pheromone dispenser in which the sex pheromone compound is contained in a capillary tube having an open end and emitted from the open end of the tube. Pheromone dispensers of this type have a defect in respect of the usually very short serviceable life because a single dispenser can contain only an extremely small amount of the pheromone compound. U.S. Patent No. 4,160,335 discloses a pheromone dispenser having a multilayered laminate of polymeric films to serve as a carrier of the pheromone compound with an object of controlling the rate of pheromone emission from a pheromone-carrying layer of a polymeric resin admixed with the pheromone compound. Pheromone dispensers of this type have a serious disadvantage that, while the rate of pheromone emission is sometimes too large in the initial stage of exposure thereof to the open field, the rate gradually decreases in the lapse of time and, moreover, a considerable amount of the pheromone compound initially contained in the dispenser remains unreleased out of the dispenser to cause a large loss of the expensive compound.

Further, West German Patent No. 2,832,248 discloses a dispenser of (S)-cis-verbenol and methyl butenol as an attractant of wood borers, i.e. *Limonoria lignorum*, in which the attractant compounds are absorbed by a porous carrier and wrapped with a film of a plastic resin such as polyethylene and the like. West German Patent No. 2,945,655 discloses a dispenser of the same attractant in which the chemicals are mixed with a pasty base and a plastic bag is filled with the mixture. Japanese Patent Kokai 59-13701 and U.S. Patent No. 4,445,641 describe a pheromone dispenser in which the pheromone compound is absorbed by a porous carrier and the pheromone-holding carrier is coated with a coating film of polyethylene and the like to control the emission rate of the pheromone compound through the coating film. These pheromone dispensers have a disadvantage in common that a considerable proportion of the pheromone compound absorbed in the carrier remains in the carrier unreleased even after prolonged exposure to the atmosphere to cause a large loss of the pheromone compound.

As is understood from the above discussion, important characteristics required for a pheromone dispenser are that the pheromone compound contained in the dispenser is emitted to the ambience at a constant rate over a long period of field exposure and that the pheromone compound initially contained in the dispenser is released out of the dispenser as completely as possible so as to minimize the loss of the expensive pheromone compound remaining as unutilized. These requirements can be satisfied by a dispenser in which a liquid pheromone compound is contained and sealed in a container having a wall provided with a barrier layer capable of exhibiting an adequate permeability to the liquid compound contained therein.

The prior art pheromone dispensers belonging to the second type of the proposals are further classified into three classes including so-called microcapsules containing the pheromone compound as the core material disclosed in U.S. Patents No. 2,800,457, No. 2,800,458 and No. 3,577,515 and elsewhere, capillary tubes of polyethylene containing the liquid pheromone compound and sealed at the ends disclosed in Japanese Patent Kokai 56-142202, 57-9705, 57-45101, 57-72904, 57-156403, 59-216802 and 60-215367 and elsewhere, and those in which the pheromone compound is wrapped in a sheet or bag of a plastic film disclosed in Journal of Economic Entomology, volume 62, No. 2, pages 517-518 (1969).

The microcapsules of the above mentioned first class are not so widely utilized in practice because of the high costs for the preparation, large loss of the pheromone compound in the process of encapsulation into microcapsules and too large rate of pheromone emission and short serviceable life as a consequence of the extremely large surface area of the microcapsules. In respect of the capillary tube-type dispensers as the second class, various improvements have been attempted by using a polyethylene tube of adequate wall thickness or by combining the polyethylene tube with a metal wire side-by-side to facilitate the hanging works on the tree twigs. Though advantageous in respect of the sustained releasability and relatively long life for service, it is reported in Journal of Economic Entomology, volume 75, No. 6, pages 1431-1436 (1985) that these tubular dispensers have a defect that the rate of pheromone emission is subject to a considerable decrease in the latter half stage of the life on service. The journal article recited for the plastic sheet- or bag-wrapped pheromone dispenser describes an example in which (Z)-7-dodecenyl acetate, which is a sex pheromone of cabbage loopers, is enclosed and sealed together with sand in a bag of 3 cm by 5 cm wide made of a

polyethylene film having a thickness of 50 to 150  $\mu\text{m}$  and is used for the purpose of intercommunication disruption. Although uniformity is obtained in the rate of pheromone emission, pheromone dispensers of this type have a disadvantage of a short life of service for only about two weeks or so because polyethylene works only insufficiently as a barrier against permeation of the pheromone compound.

Dispensers of the third type in the prior art are proposed in U.S. Patent No. 3,343,663, No. 3,785,556 and No. 4,161,283 and elsewhere in which a biologically active vaporizable substance other than sex pheromones of insects and the like, is wrapped with a sheet or a bag made of a plastic film and the compound is emitted to the atmosphere at a controlled rate through the plastic film.

Although a variety of different types of pheromone dispensers have been proposed as is described above, those by using a capillary tube made of polyethylene and by using a plastic film or bag are the only examples of the pheromone dispensers used for the purpose of intercommunication disruption or population control of pests each containing at least 40 mg of a sex pheromone compound which is an unsaturated aliphatic ester, aldehyde or ketone having 12 to 20 carbon atoms in a molecule. These dispensers are all made by using polyethylene as a material of the dispenser body. This is because this polymeric material has an adequate affinity with pheromone compounds but is inert thereto absorbing only a very small amount thereof, has excellent workability such as good weldability in the sealing works of the dispenser body containing the pheromone compound and has excellent mechanical strengths and resistance against water as the essential properties required for pheromone dispensers.

The tubular dispensers have a defect that, although the rate of pheromone emission can be controlled over two months or longer as a consequence of the wall thickness of at least 300  $\mu\text{m}$  of the capillary tube of polyethylene, the rate of pheromone emission is subject to a considerable decrease in the latter half of the life for service. The bag-like dispensers are under a limitation in respect of the workability of a plastic film into bags that the plastic film must have a thickness not exceeding 200  $\mu\text{m}$  so that bag-type dispensers made from polyethylene alone have a limited life of service and are not suitable for the purpose of emission control over two months or longer as in the tubular dispensers because polyethylene cannot provide a sufficient barrier. When the temperature of ambience is high and the wind velocity is low, in addition, the vaporization velocity of the pheromone compound from the dispenser walls would be too low to dissipate the whole amount of the pheromone compound having reached the outer surface of the dispenser after permeation through the polyethylene walls so that the outer surface of the dispenser is always wet with the pheromone compound oozing out to increase deposition of dusts with great troubles in the outdoor use of the dispensers.

As is described above, there is known no high-performance pheromone dispenser in which a plastic film having a thickness of 200  $\mu\text{m}$  or smaller serves as a barrier against permeation of the pheromone compound enabling control of the rate of pheromone emission over a period of at least two months without a wet condition of the surface. The inventors have continued extensive investigations to develop a sustained-release dispenser of a sex pheromone compound of insects which is an aliphatic unsaturated acetate, aldehyde or ketone compound, of which the amount of the pheromone compound contained in a single dispenser is at least 40 mg, and arrived at a conclusion that a sustained-release pheromone dispenser could well satisfy the requirements without the problems and disadvantages in the tubular or bag-like dispensers in the prior art.

## SUMMARY OF THE INVENTION

Thus, the sustained-release pheromone dispenser of the present invention comprises:

(A) a pheromone compound; and

(B) a bag containing the pheromone compound made at least partly of a laminate film of an overall thickness in the range from 20 to 200  $\mu\text{m}$  composed of at least two layers, of which one is a film of a poly(vinylidene chloride) or a copolymer mainly composed of vinylidene chloride having a thickness in the range from 4 to 20  $\mu\text{m}$  and the other or each of the others, the thickness or overall thickness being in the range from 10 to 196  $\mu\text{m}$ , is a film of a polymer selected from the group consisting of polyolefins, copolymers of ethylene and vinyl acetate, polymers of vinyl chloride and copolymers thereof, polymers of an acrylic acid ester or copolymers thereof, polymers of a methacrylic acid ester and copolymers thereof, cellulose esters and cellulose ethers.

In particular, the above mentioned laminate film is composed of three layers of which the intermediate layer is made of a film of a polymer or copolymer of vinylidene chloride having a thickness in the range from 4 to 20  $\mu\text{m}$ , the outer layer is a film of a polyolefin or a copolymer of ethylene and vinyl acetate having a thickness in the range from 10 to 100  $\mu\text{m}$  and the inner layer is a film of a polymer selected from the group consisting of polyolefins, copolymers of ethylene and vinyl acetate, poly(vinyl chloride) and copolymers of vinyl chloride and vinyl acetate having a thickness in the range from 5 to 100  $\mu\text{m}$ .

## BRIEF DESCRIPTION OF THE DRAWING

Figure 1 is a cross sectional view of the inventive sustained-release pheromone dispenser.  
Figure 2 is an enlarged partial cross sectional view of the dispenser illustrated in Figure 1.

Figures 3 to 9 are each an enlarged partial cross sectional view of one of different embodiments of the inventive pheromone dispensers.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As is described above, the body of the inventive pheromone dispenser is a bag made of a plastic film and at least a part of the bag walls is made of a laminate film composed of at least two different plastic films of a specific polymeric resin. In the following, the cross sectional structure of the bag body is described in detail with reference to the accompanying drawing.

Figure 1 illustrates a cross sectional view of the inventive sustained-release pheromone dispenser 1, the body of which is a bag 2 formed of a laminated film 3 by adhesively bonding or welding two sheets of the same along the periphery 4 to contain a liquid pheromone compound 5 enclosed therein. The laminate film 3 is composed of at least two layers of which one is a film A of a poly(vinylidene chloride) or a copolymer mainly composed of vinylidene chloride and the other or each of the others B is a film of a polymer different from polymers of vinylidene chloride. As is illustrated in Figures 3 and 4, the film A forms the outer layer or inner layer, respectively, with the film B forming the inner layer or the outer layer. When the layer B is formed of several films B<sub>1</sub>, B<sub>2</sub>, . . . . of different polymers, the laminating order of these films and the film A is also not limitative including the orders of, for example, B<sub>1</sub>-A-B<sub>2</sub> in a three-ply laminate shown in Figure 5, B<sub>1</sub>-A-B<sub>2</sub>-B<sub>3</sub> in a four-ply laminate shown in Figure 6, B<sub>1</sub>-B<sub>2</sub>-A-B<sub>3</sub> in a four-ply laminate shown in Figure 7, B<sub>1</sub>-B<sub>2</sub>-A-B<sub>2</sub>-B<sub>1</sub> in a five-ply laminate shown in Figure 8 and so on to be selected according to need.

In the pheromone dispenser of the invention, one of the layers in these multi-ply laminates is a film of a poly(vinylidene chloride) or a copolymer mainly composed of vinylidene chloride having a thickness in the range from 4 to 20  $\mu\text{m}$ . The use of a film A of the specific polymeric resin can overcome the problems and disadvantages in the conventional bag-like pheromone dispensers that the barrier action against permeation of the pheromone compound through the bag walls is low and effective control of the emission rate of the pheromone can be obtained only for a very limited period of time and that, when the pheromone dispenser is exposed to an ambience at a relatively high temperature under weak wind blow, the permeation rate of the pheromone compound through the polymeric bag wall is so high as to exceed the vaporization rate of the pheromone compound from the bag surface so that the surface of the bag is wettish with the liquid pheromone compound to accelerate deposition of dusts on the surface resulting in an undesirable decrease in the performance of the pheromone dispenser.

When the thickness of the layer A exceeds 20  $\mu\text{m}$ , the barrier action by the layer is too strong so that the rate of pheromone emission may be too low. When the thickness of the layer A is smaller than 4  $\mu\text{m}$ , on the other hand, the layer serves as a barrier only insufficiently. The copolymer of vinylidene chloride here implied is a copolymer of which at least 50% by weight is the moiety of vinylidene chloride, the rest being the moiety of other monomers such as vinyl chloride, acrylic acid, acrylic acid esters, vinyl acetate, acrylonitrile and the like.

The other layer or layers than the layer A is a film or are films made from a polymer selected from the group consisting of polyolefins, e.g., polyethylene and polypropylene, copolymers of ethylene and vinyl acetate, poly(vinyl chloride) and copolymers of vinyl chloride, polymers and copolymers of acrylic acid esters, polymers and copolymers of methacrylic acid esters, cellulose esters and cellulose ethers such as ethyl cellulose. The barrier action of these layers is lower than the layer A made from a poly(vinylidene chloride) or a copolymer of vinylidene chloride to permit permeation of the pheromone compound therethrough. These layers B serve to reinforce the layer A having a thickness of 4 to 20  $\mu\text{m}$  which alone has low mechanical strengths not to ensure practical use of the bag-like dispensers made of such a film alone. In addition, the above mentioned polymers have a relatively high affinity with the pheromone compound so that the layer or layers B exhibit a buffer action to impart the dispenser with adaptability to the changes in the outer environmental conditions such as temperature and wind velocity so that the problem of wettish bag surface with the pheromone compound due to adverse changes in the meteorological elements can be solved more completely. When the layer B is used as the inner layer of the bag, moreover, the heat-sealability of the laminate films can be greatly improved. In this regard, in particular, it is advantageous that the layer A is sandwiched with the layers of B forming the outermost and innermost layers. When two or more of the layers B are provided, the overall thickness of the layers B should be in the range from 10 to 196  $\mu\text{m}$ .

Figure 5 illustrates a particular example of such a laminate film by a cross section, which is composed of the outermost layer B<sub>1</sub> of a polyolefin, e.g., polyethylene or polypropylene, or a copolymer of ethylene and vinyl acetate having a thickness of 10 to 100  $\mu\text{m}$ , the intermediate layer A of a polymer or copolymer of vinylidene chloride having a thickness of 4 to 20  $\mu\text{m}$  and the innermost layer B<sub>2</sub> of a polymeric resin with good heat-sealability and relatively high permeability to the pheromone compound such as a polyolefin, e.g., polyethylene and polypropylene, copolymer of ethylene and vinyl acetate, poly(vinyl chloride), copolymer of vinyl chloride and vinyl acetate and the like having a thickness of 5 to 100  $\mu\text{m}$ . When the outermost layer B<sub>1</sub> has a thickness smaller than 10  $\mu\text{m}$ , the performance of the laminate film is undesirably decreased. When the outermost layer has a thickness larger than 100  $\mu\text{m}$ , on the other hand, the workability of the laminate film into bags is undesirably decreased. The innermost layer B<sub>2</sub> not only plays a role to impart heat-sealability to the laminate film but also contributes to reinforce and stabilize the intermediate layer. These effects of the innermost layer would be decreased when the thickness thereof is smaller than 5  $\mu\text{m}$  while the workability of

emission rate of 0.7 mg/day of the pheromone compound could be maintained for 100 days or longer and no wettishness of the bag surface was noted indicating usefulness of the pheromone dispenser in practical applications.

#### Example 3.

The experimental procedure was substantially the same as in Example 1 excepting replacement of the three-layered laminate film with a two-layered laminate film having an overall thickness of 35  $\mu\text{m}$  and composed of a film of a poly(vinylidene chloride) having a thickness of 5  $\mu\text{m}$  as the outer layer and a film of a copolymer of 88% by weight of ethylene and 12 % by weight of vinyl acetate having a thickness of 30  $\mu\text{m}$  as the inner layer. The results were that a uniform emission rate of 0.7 mg/day of the pheromone compound could be maintained for 100 days or longer and no wettishness of the bag surface was noted indicating usefulness of the pheromone dispenser in practical applications.

#### Example 4 to 13.

Nine different types of bag-like pheromone dispensers were prepared by using different laminate films indicated in Table 1 below and enclosing each 80 mg of different pheromone compounds also indicated in Table 1. These pheromone dispensers were tested under the same conditions as in Example 1. A uniform emission rate of the pheromone compound shown in Table 1 could be obtained in each type of the dispensers over a period of at least 60 days. Wettishness of the surface was noted in none of the dispensers and each of the dispensers had a mechanical strength to withstand handling without particular carefulness.

The constitution of each laminate film is shown in the table by the kinds of the polymeric resins A<sub>1</sub> and A<sub>2</sub> and B<sub>1</sub> to B<sub>6</sub> shown below and the thickness in  $\mu\text{m}$  of each layer in brackets in an order from the outermost layer to the innermost layer. The bags in Examples 6 and 10 were prepared by using the pheromone-permeable laminate film for one side alone and the other side of the bag was formed of a pheromone-impermeable film which was a laminate film of a poly(ethylene terephthalate) film and a low-density polyethylene film in Example 6 and a laminate film of an aluminum foil and a low-density polyethylene film in Example 10. The amount of the enclosed pheromone compound was increased to 160 mg in Example 13.

#### Polymeric resin of laminate layers

A<sub>1</sub>: poly(vinylidenechloride) A<sub>2</sub>: 8:2 by weight copolymer of vinylidene chloride and vinyl chloride B<sub>1</sub>: low-density polyethylene B<sub>2</sub>: high-density polyethylene B<sub>3</sub>: polypropylene B<sub>4</sub>: poly(vinylchloride) B<sub>5</sub>: poly(methyl acrylate) B<sub>6</sub>: cellulose acetate

The pheromone compound enclosed in each of the pheromone dispensers was as shown below.

HDDA : (Z,Z/E)-7,11-hexadecadienylacetate

TDA : (Z)-11-tetradecenyl acetate

ICN : (Z)-icosen-11-one

HDAL : (Z)-11-hexadecenal

DDA : (Z)-8-dodecenyl acetate

Table 1

Example No.	Laminate film Polymer of layer (thickness, $\mu\text{m}$ )(outermost- innermost)	Overall thickness, $\mu\text{m}$	Bag		Pheromone compound	Emission rate, mg/day
			Effective surface area, $\text{mm}^2$	Dimensions (inside measure)		
4	B <sub>1</sub> (27) - A <sub>1</sub> (9) - B <sub>1</sub> (27)	63	1200	20 mm x 30 mm	HDAL	0.6
5	B <sub>1</sub> (27) - A <sub>1</sub> (9) - B <sub>1</sub> (27)	63	1200	20 mm x 30 mm	ICN	0.2
6	B <sub>2</sub> (15) - A <sub>1</sub> (8) - B <sub>1</sub> (20)	43	600*	20 mm x 30 mm	TDA	0.6
7	B <sub>1</sub> (45) - A <sub>2</sub> (12) - B <sub>1</sub> (45)	102	1800	30 mm x 30 mm	HDDA	0.6
8	B <sub>1</sub> (100) - A <sub>1</sub> (18) - B <sub>1</sub> (82)	180	1200	20 mm x 30 mm	DDA	0.8
9	B <sub>3</sub> (10) - A <sub>2</sub> (4) - B <sub>1</sub> (10)	24	1200	20 mm x 30 mm	HDDA	0.7
10	B <sub>2</sub> (20) - A <sub>2</sub> (8) - B <sub>1</sub> (15)	43	600*	20 mm x 30 mm	TDA	0.6
11	B <sub>1</sub> (20) - B <sub>4</sub> (22) - A <sub>2</sub> (18) - B <sub>1</sub> (100)	160	1800	30 mm x 30 mm	DDA	0.8
12	B <sub>1</sub> (10) - B <sub>5</sub> (10) - A <sub>2</sub> (9) - B <sub>6</sub> (10) - B <sub>1</sub> (10)	49	1800	30 mm x 30 mm	HDDA	0.7
13	B <sub>1</sub> (45) - A <sub>2</sub> (12) - B <sub>1</sub> (45)	102	5800	70 mm x 40 mm	HDDA	1.9

\*) pheromone-impermeable film for one side, see text.

## Claims

1. A sustained-release dispenser of a sex pheromone compound of insects which comprises:
  - (a) a sex pheromone compound of insects in the form of liquid; and
  - (b) a bag containing the sex pheromone compound made at least partly of a laminate film having a thickness in the range from 20  $\mu\text{m}$  to 200  $\mu\text{m}$  and composed of at least two layers, of which (A) one is a film of a poly(vinylidene chloride) or a copolymer mainly composed of vinylidene chloride having a thickness in the range from 4  $\mu\text{m}$  to 20  $\mu\text{m}$  and (B) the other or each of the others, the thickness or total thickness thereof being in the range from 10  $\mu\text{m}$  to 196  $\mu\text{m}$ , is a film of a polymer selected from the group consisting of polyolefins, copolymers of ethylene and vinyl acetate, polymers and copolymers of vinyl chloride, polymers and copolymers of an acrylic acid ester, cellulose esters and cellulose ethers.
2. The sustained-release dispenser of a sex pheromone compound of insects as claimed in claim 1 wherein the laminate film is composed of three layers of which the outer layer facing outside of the bag is a film of a polyolefin or a copolymer of ethylene and vinyl acetate having a thickness in the range from 10  $\mu\text{m}$  to 100  $\mu\text{m}$ , the intermediate layer is a film of a polymer or copolymer of vinylidene chloride having a thickness in the range from 4  $\mu\text{m}$  to 20  $\mu\text{m}$  and the inner layer facing inside of the bag is a film of a polymer selected from the group consisting of polyolefins, copolymers of ethylene and vinyl acetate, poly(vinyl chloride) and copolymers of vinyl chloride and vinyl acetate having a thickness in the range from 5  $\mu\text{m}$  to 100  $\mu\text{m}$ .
3. The sustained-release dispenser of a sex pheromone compound of insects as claimed in claim 1 wherein a portion of the bag having an area in the range from 100  $\text{mm}^2$  to 6000  $\text{mm}^2$  is made of the laminate film.
4. The sustained-release dispenser of a sex pheromone compound of insects as claimed in claim 1 wherein the copolymer mainly composed of vinylidene chloride contains at least 50% by weight of the vinylidene chloride moiety, the balance being the moiety of a monomer or monomers selected from the group consisting of vinyl chloride, acrylic acid, acrylic acid esters, vinyl chloride and acrylonitrile.
5. A sustained-release dispenser of a sex pheromone compound of insects, which is a compound selected from the group consisting of aliphatically unsaturated hydrocarbon compounds, acetates, aldehydes and ketons having 12 to 20 carbon atoms in a molecule in the form of liquid, which comprises:
  - (a) the sex pheromone compound of insects; and
  - (b) a bag containing the sex pheromone compound made at least partly of a laminate film having a thickness in the range from 20  $\mu\text{m}$  to 200  $\mu\text{m}$  and composed of at least two layers, of which (A) one is a film of a poly(vinylidene chloride) or a copolymer mainly composed of vinylidene chloride having a thickness in the range from 4  $\mu\text{m}$  to 20  $\mu\text{m}$  and (B) the other or each of the others, the thickness or total thickness thereof being in the range from 10  $\mu\text{m}$  to 196  $\mu\text{m}$ , is a film of a polymer selected from the group consisting of polyolefins, copolymers of ethylene and vinyl acetate, polymers and copolymers of vinyl chloride, polymers and copolymers of an acrylic acid ester, cellulose esters and cellulose ethers.

FIG. 1

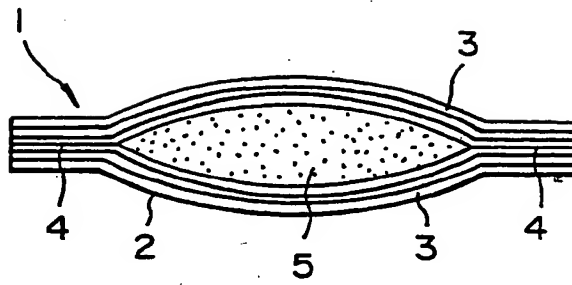


FIG. 2




FIG. 3




FIG. 4




FIG. 5




FIG. 6




FIG. 7




FIG. 8





FIG. 9

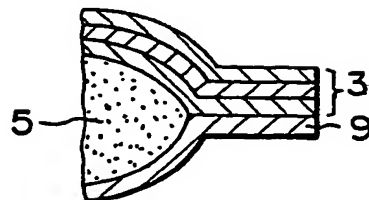

**THIS PAGE BLANK (USPTO)**

12 EUROPEAN PATENT APPLICATION

21 Application number: 89401321.8

22 Date of filing: 11.05.89

51 Int. Cl.<sup>5</sup>: A01N 25/18, A01N 25/34,  
 A01M 1/02, B32B 27/08,  
 //(A01N25/18,37:02,35:02)

30 Priority: 13.05.88 JP 116650/88  
 29.09.88 JP 245417/88

43 Date of publication of application:  
 15.11.89 Bulletin 89/46

64 Designated Contracting States:  
 DE FR GB

66 Date of deferred publication of the search report  
 30.05.90 Bulletin 90/22

71 Applicant: Shin-Etsu Chemical Co., Ltd.  
 6-1, Otemachi 2-chome  
 Chiyoda-ku Tokyo 100(JP)


72 Inventor: Yamamoto, Akira  
 2-14-45 Gochi  
 Joetsu-shi Niigata-ken(JP)  
 Inventor: Saguchi, Ryuichi  
 7, Sanai-cho  
 Joetsu-shi Niigata-ken(JP)  
 Inventor: Nagura, Shigehiro  
 1-4-7, Minato-cho 2-chome  
 Joetsu-shi Niigata-ken(JP)

74 Representative: Armengaud Aîné, Alain et al  
 Cabinet ARMENGAUD AINE 3 Avenue  
 Bugeaud  
 F-75116 Paris(FR)

54 Sustained-release pheromone dispenser.

57 A bag-like dispenser is proposed which contains a sex pheromone compound of insects and is used for sustainedly releasing the pheromone compound at a uniform emission rate over a long period of time so as to exhibit effectiveness for the population control of pests by distributing a number of the dispensers over fields. The bag-like dispenser body is formed of a specific polymeric laminate film having a thickness of 20-200  $\mu\text{m}$  and composed of at least two layers or, preferably, of three layers, in which one of the layers is a film of a polymer or copolymer of vinylidene chloride having a thickness of 4-20  $\mu\text{m}$  as the intermediate layer of the three-layered laminate and the other layer or each of the other layers is a film of a specific polymer having a specified thickness, such as a film of a polyolefin, copolymer of ethylene and vinyl acetate, poly(vinyl chloride), copolymer of vinyl chloride and vinyl acetate and the like.

FIG. 1

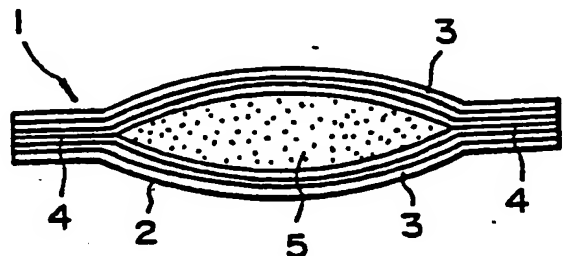



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number

EP 89 40 1321

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
Y	EP-A-0 243 263 (SHIN-ETSU CHEMICAL CO. LTD) * Page 6, line 3 - page 7, line 2; example 1; claims *	1-5	A 01 N 25/18 A 01 N 25/34 A 01 M 1/02 B 32 B 27/08 //
Y	EP-A-0 028 818 (CELAMERCK GmbH) * Page 2, line 27 - page 3, line 4; page 3, line 27 - page 4, line 18 * & DE-A-2 945 655 (Cat. D,Y)	1-5	(A 01 N 25/18 A 01 N 37:02 A 01 N 35:02 )
A	GB-A-2 038 183 (BUSH BOAKE ALLEN LTD) * Page 2, line 128 - page 3, line 1; page 4, lines 117-125; claims 1,4 *	1-5	
D,A	JOURNAL OF ECONOMIC ENTOMOLOGY, vol. 62, no. 2, 15th April 1969, pages 517-518, Entomological Society of America; H.H. TOBA et al.: "A polyethylene bag for dispensing the synthetic sex pheromone of the cabbage looper 1,2,3"	1-5	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
			A 01 N B 32 B A 01 M
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29-01-1990	Examiner FLETCHER A.S.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P0401)